


FERRI QUARTZITE







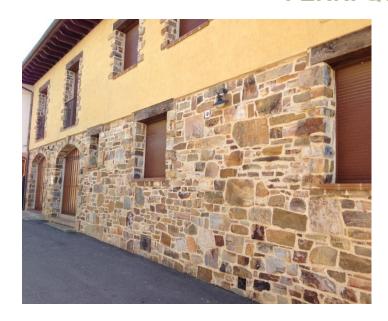



TEST METHODS	RESULTS
Petrographic Examination (UNE-EN 12407:2007)	Quartzite
Water Absorption (UNE-EN 13755:2008)	Mean Value 0,2%
Apparent Density and Open Porosity (UNE-EN 1936:2007)	Mean Value of Apparent Density 2.640 Kg / m3 Mean Value of Open Porosity 1 %
Compression Strength (UNE-EN 1926:2007)	Mean Value of Compression Strength 137 MPa
Flexural Strength (UNE-EN 12371:2000)	Mean Value of Flexural Strength 20,3 MPa
Water Absorption by Capillarity (UNE-EN 1925:2009)	Mean Value of Coefficients 0,605 g / m2s0,5











